

KanexPro®

CON-AUDXTRACT

USER MANUAL



Extract multi-channel audio from HDMI

All Rights Reserved

Version: CON-AUDXTRACT_2016V1.2

Preface

Read this user manual carefully before using this product. Pictures shown in this manual is for reference only, different model and specifications are subject to real product.

This manual is only for operation instruction only, not for any maintenance usage. The functions described in this version are updated till June 2016. Any changes of functions and parameters since then will be informed separately. Please refer to the dealers for the latest details.

All product function is valid till 2016-6-2.

Trademarks

Product model and logo are trademarks. Any other trademarks mentioned in this manual are acknowledged as the properties of the trademark owner. No part of this publication may be copied or reproduced without the prior written consent.

FCC Statement

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. It has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a commercial installation.

Operation of this equipment in a residential area is likely to cause interference, in which case the user at their own expense will be required to take whatever measures may be necessary to correct the interference

Any changes or modifications not expressly approved by the manufacture would void the user's authority to operate the equipment.



SAFETY PRECAUTIONS

To insure the best from the product, please read all instructions carefully before using the device. Save this manual for further reference.

- Unpack the equipment carefully and save the original box and packing material for possible future shipment
- Follow basic safety precautions to reduce the risk of fire, electrical shock and injury to persons.
- Do not dismantle the housing or modify the module. It may result in electrical shock or burn.
- Using supplies or parts not meeting the products' specifications may cause damage, deterioration or malfunction.
- Refer all servicing to qualified service personnel.
- To prevent fire or shock hazard, do not expose the unit to rain, moisture or install this product near water.
- Do not put any heavy items on the extension cable in case of extrusion.
- Do not remove the housing of the device as opening or removing housing may expose you to dangerous voltage or other hazards.
- Install the device in a place with fine ventilation to avoid damage caused by overheat.
- Keep the module away from liquids.
- Spillage into the housing may result in fire, electrical shock, or equipment damage. If an object or liquid falls or spills on to the housing, unplug the module immediately.
- Do not twist or pull by force ends of the optical cable. It can cause malfunction.
- Do not use liquid or aerosol cleaners to clean this unit. Always unplug the power to the device before cleaning.
- Unplug the power cord when left unused for a long period of time.
- Information on disposal for scrapped devices: do not burn or mix with general household waste, please treat them as normal electrical wastes.

Table of Contents

- 1. Introduction.....5
 - 1.1 Introduction to CON-AUDXTRACT5
 - 1.2 Features5
 - 1.3 Packing List.....6
- 2. Panel Description6
- 3. System Connection7
 - 3.1 Usage Precautions.....7
 - 3.2 System Diagram.....7
 - 3.3 Connection Procedure8
- 4. Specification9
- 5. Panel Drawing10
- 6. Troubleshooting & Maintenance.....11
- 7. After-sales Service12
- 8. Warranty13

1. Introduction

1.1 Introduction to CON-AUDXTRACT

The KanexPro CON-AUDXTRACT is our next generation of audio converter designed to extract the encoded multi-channel LPCM, Dolby Digital 5.1, DTS-HD 5.1 from HDMI sources to optical audio output and decode to 2 CH's analog stereo audio via RCA (L/R) and COAX outputs without any other external AV equipment.

Licensed by Dolby Labs, this audio extractor is HDCP 2.2 compliant and also supports 4K pass-through resolutions when connected to a 4K sources and display.

Content from multi-channel sources such as Blu-ray players, set-top boxes and game consoles can be spread to multi-channel and two-channel-capable zones simultaneously, ensuring compatibility, reducing system complexity and eliminating the expense of separate dedicated sources for each zone and you can listen to digital audio sources such as DVD and CD players or digital computer audio on your legacy analog sound system, preserving your current investment in AV systems.

1.2 Features


- De-embeds HDMI audio output simultaneously to Stereo and S/PDIF
- Converts 2CH from 24-bit up to 192 kHz audio
- HDCP 2.2 and HDMI2.0 compliant
- Supports 3D & CEC pass-through
- Supports selectable audio through switching
- Audio: 2.0CH/5.1CH selection through
- HD resolution to full 1080p/60
- Supports data rates up to 6.75Gbps
- Automatic cable input equalization
- Supports Color Depth up to 12-bit per channel (36-bit all channels)
- Supports uncompressed audio such as LPCM
- Supports compressed audio such as DTS Digital, Dolby Digital

1.3 Packing List


- 1 x HDMI Audio Decoder
- 2 x Mounting ears (with 4 Screws)
- 1 x Power adapter (DC 12V 1A)
- 1 x User manual

Notes: If you find any defective or missing parts, please contact your local dealer.

2. Panel Description

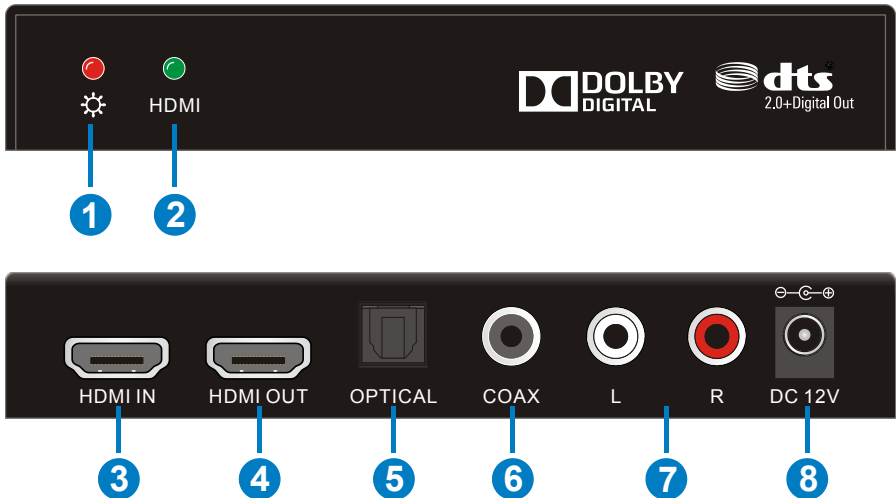

- | | |
|--------------------------|------------------------|
| ⊖ Power LED | ⊖ HDMI Activity LED |
| ⊗ HDMI Input | ④ HDMI Output |
| ⑤ Optical Audio Output | ⑥ Coaxial Audio Output |
| ⑦ RCA (L/R) Audio Output | ⑧ 12V DC Input |


 Pictures shown in this manual are only for reference.

3. System Connection

3.1 Usage Precautions

- 1) System should be installed in a clean environment and has a proper temperature and humidity.
- 2) All of the power switches, plugs, sockets and power cords should be insulated and safe.
- 3) All devices should be connected before power on.
- 4) System Diagram shown in this manual is for reference only, more specific schemes depend on real-time applications.

3.2 System Diagram

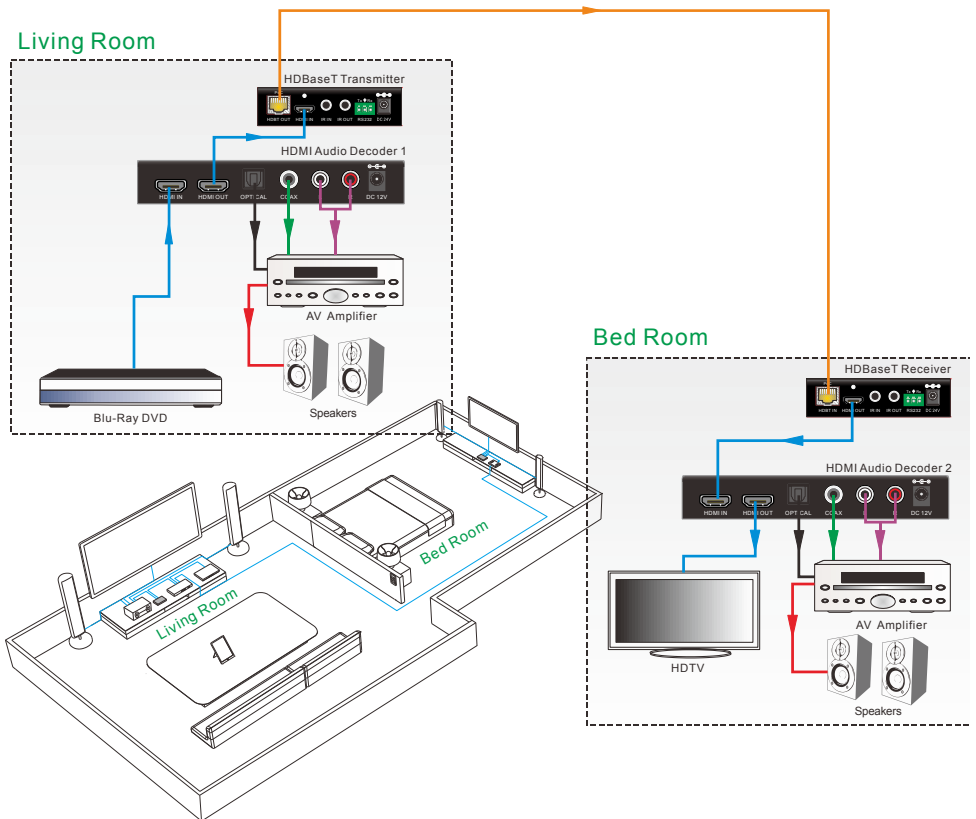

3.3 Connection Procedure


- Step1.** In the living room, connect a HDMI signal cable between the HDMI source and the HDMI IN port of CON-AUDXTRACT-1.
- Step2.** Connect an optical audio cable between the AV Amplifier and OPTICAL port of CON-AUDXTRACT-1.
- Step3.** Connect a coaxial audio cable between the AV Amplifier and COAX port of CON-AUDXTRACT-1.
- Step4.** Connect a RCA audio cable between the AV Amplifier and L/R port of CON-AUDXTRACT-1.
- Step5.** Connect a HDMI signal cable between the HDMI IN port of HDBaseT transmitter and HDMI OUT port of CON-AUDXTRACT-1.
- Step6.** Connect a Network cable between the HDBT OUT port of HDBaseT Transmitter and the HDBT IN port of HDBaseT Receiver.
- Step7.** Connect a HDMI signal cable between the HDMI OUT port of HDBaseT Receiver and the HDMI IN port of CON-AUDXTRACT-2.
- Step8.** Connect a HDMI signal cable between the HDTV and the HDMI OUT port of CON-AUDXTRACT-2.
- Step9.** Connect an optical audio cable between the AV Amplifier and OPTICAL port of CON-AUDXTRACT-2.
- Step10.** Connect a coaxial audio cable between the AV Amplifier and COAX port of CON-AUDXTRACT-2.
- Step11.** Connect a RCA audio cable between the AV Amplifier and L/R port of CON-AUDXTRACT-2.
- Step12.** Plug power adaptors.

4. Specification

Input Signal	1 × HDMI (Type A Receptacle)
Output Signal	1 × HDMI (Type A Receptacle) 1 × OPTICAL (Toslink Receptacle) 1 × COAX (Black RCA Receptacle) 1 × L/R (Red & White RCA Receptacle)
Maximum Video Compatibility	Deep Color 8/10/12/16 Bit at 1080p and 2160p/60
HDMI Resolution	Up to 4Kx2K@60Hz
HDMI Embedded Audio	PCM, Dolby Digital, Dolby TrueHD, DTS, DTS-HD
Decoded Audio	PCM2.0
HDMI Cable	≤50ft AWG24 HDMI standard cable
Power Supply	Input: AC (50HZ, 60HZ) 100V-240V; Output: DC12V/1A
Maximum Power Consumption	4.5W
Operating Temperature	-10 ~ +55°C
Storage Temperature	-20 ~ 70°C
Operating Humidity	10 ~ 90%
Storage Humidity	10 ~90%
Dimensions (W x H x D)	5.1 X 0.86 X 3.03 Inches
Weight	6.06 oz.

NOTE: All nominal levels are at ±10%.

5. Panel Drawing

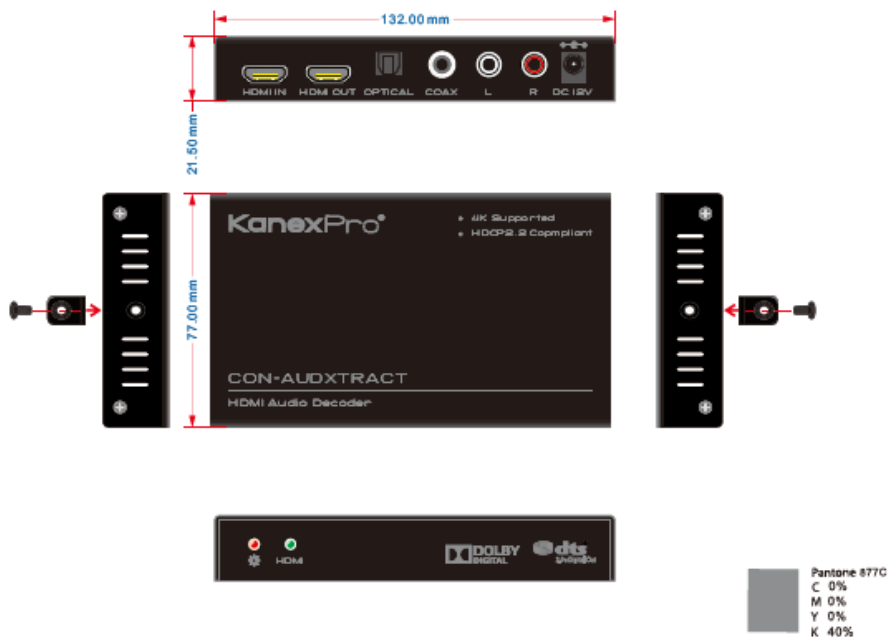

6. Troubleshooting & Maintenance

Problems	Causes	Solutions
Output images in display show with ghost	Incorrect setting on the display	Check the display's setting
	A cable of bad quality	Try another high quality connection cable
No output image when switching	No signal at the input / output end	Check with oscilloscope or multimeter if there is any signal at the input / output end.
	Fail or loose connection	Make sure the connection is good
	The extender is broken	Send it to authorized dealer for repairing.
Static becomes stronger when connecting the video connectors	Bad grounding	Check the grounding and make sure it is connected well.

If your problem persists after following the above troubleshooting steps, seek further help from authorized dealer or our technical support.

7. After-sales Service

If there appear some problems when running the device, please check and deal with the problems reference to this user manual. Any transport costs are borne by the users during the warranty.

1) Product Limited Warranty: We warrants that its products will be free from defects in materials and workmanship for **Two years**, which starts from the first day the product leaves warehouse (check the SN mark on the product). Proof of purchase in the form of a bill of sale or receipted invoice must be presented to obtain warranty service.

2) What the warranty does not cover:

- Warranty expiration.
- Factory applied serial number has been altered or removed from the product.
- Damage, deterioration or malfunction caused by:
 - Normal wear and tear
 - Use of supplies or parts not meeting our specifications
 - No certificate or invoice as the proof of warranty.
 - The product model showed on the warranty card does not match with the model of the product for repairing or had been altered.
 - Damage caused by force majeure.
 - Servicing not authorized
 - Any other causes which does not relate to a product defect
- Delivery, installation or labor charges for installation or setup of the product

3) Technical Support: Email to our after-sales department or make a call, please inform us the following information about your cases.

- Product version and name.
- Detailed failure situations.
- The formation of the cases.

Remarks: For any questions or problems, please try to get help from your local distributor or contact kanexpro.com or call us at 888-975-1368 for further support.

8. Warranty

A. LIMITED WARRANTY

KanexPro™ warrants that (a) its products (the “Product”) will perform greatly in agreement with the accompanying written materials for a period of 36 months (3 full years) from the date of receipt and (b) that the product will be free from defects in materials and workmanship under normal use and service for a period of 3 years.

B. CUSTOMER REMEDIES

KanexPro’s entire liability and Customer’s exclusive remedy shall be, at KanexPro option, either return of the price paid for the product, or repair or replacement of the Product that does not meet this Limited Warranty and which is returned to KanexPro with a copy of customers’ receipt. This Limited Warranty is void if failure of the Product has resulted from accident, abuse, or misapplication. Any replacement Product will be warranted for the remainder of the original warranty period of 3 years, whichever is longer.

C. NO OTHER WARRANTIES

To the maximum extent permitted by applicable law, KanexPro disclaims all other warranties, either express or implied, including, but not limited to implied warranties of merchantability and fitness for a particular purpose, with regard to the product and any related written materials. This limited warranty gives customers specific legal rights. Customers may have other rights depending on the jurisdiction.

D. NO LIABILITY FOR DAMAGES

To the maximum extent permitted by applicable law, in no event shall KanexPro be liable for any damages whatsoever (including without limitation, special, incidental, consequential, or indirect damages for personal injury, loss of business profits, business interruption, loss of business information, or any other pecuniary loss) arising out of the use of or inability to use this product, even if KanexPro has been advised of the possibility of such damages.

KanexPro[®]

1405 pioneer street

Brea, CA 92821