

KanexPro®

18G HDMI and mDP 50M Extender Wall Plate kit



MPN: WP-EXTHDMDP50
VER 1.0

Surge protection device recommended

This product contains sensitive electrical components that may be damaged by electrical spikes, surges, electric shock, lighting strikes, etc. Use of surge protection systems is highly recommended in order to protect and extend the life of your equipment.

After-sales Service

KanexPro provides a 3 year limited warranty for this product. Please reach out to support@kanexpro.com for additional details.

Table of Contents

1. Introduction.	3
2. Features.	3
3. Package Contents.	3
4. Specifications.	4
5. Product Dimensions.	5
6. Operation Controls and Functions.	6
6.1 Transmitter Panel.	6
6.2 Receiver Panel.	7
7. Application Example.	8

1. Introduction

The KanexPro HDMI and MiniDisplayPort (mDP) 50M Extender Wall Plate kit is a 2x1 switcher and transmitter with HDMI and MiniDisplayPort inputs. It features a US one-gang enclosure for Decora-style wall plate openings with white wall plates and faceplates. Supports video resolutions up to 4K2K@50/60Hz 4:4:4. The RJ56 output can extend video transmission at distances up to 164ft or 50m. The wall-plate transmitter is remotely powered by the receiver via POC technology.

2. FEATURES:

- Compliant with HDMI 2.0b, HDCP 2.2 and Display Port 1.2a
- Support 18Gbps video bandwidth
- Video resolution up to 4K/UHD@60Hz 4:4:4
- CAT6 output can extend video transmission distance up to 164ft / 50m for 4K@24 or 115ft / 35m for 4K@60 444 via a single CAT5e/6 cable
- Support 3D and HDR format video, does not support CEC control
- HDMI audio formats support LPCM, Dolby Digital/Plus/EX, Dolby True HD, DTS, DTS-EX, DTS-96/24, DTS High Res, DTS-HD Master Audio, DSD
- Support HDMI and MDP input
- US one-gang enclosure for Decora-style wall plate openings
- Input signal selection supports automatic mode and manual mode
- Support POC function (only from Receiver to Transmitter)

3. PACKAGE CONTENTS:


- 1x 18Gbps CAT 50M with MDP/HDMI Wall Plate Transmitter
- 1x User Manual
- 1x Extender Receiver
- 1x 12V1A Power Supply including international plugs

4. Specifications:

Technical	
HDMI Compliance	HDMI 2.0b
HDCP Compliance	HDCP 2.2
DP Compliance	Display Port 1.2a
Video Bandwidth	DP: 5.4 Gbps
	HDMI: 18 Gbps
Video Resolution	480i-1080p50/60Hz, 4Kx2K@24/30Hz, 4k2k@60Hz
Color Space	RGB, YCbCr 4:4:4 / 4:2:2, YUV 4:2:0
Color Depth	8/10/12-bit (1080P@60Hz) 8-bit (4K@60Hz)
HDR	Support
HDMI Audio Formats	LPCM, Dolby Digital/Plus/EX, Dolby True HD, DTS, DTS-EX, DTS-96/24, DTS High Res, DTS-HD, Master Audio, DSD
Transmission Distance	Max distance (4K@24) : 164ft / 50m over CAT5e/6 Max distance (4K@60) : 115ft / 35m over CAT5e/6
ESD Protection	Human body model — ±8kV (Air-gap discharge) & ±4kV (Contact discharge)
Connection	
Transmitter	Inputs: 1 x HDMI Type A [19-pin female] 1 x mini DP [20-pin female] Output: 1 x CAT6 OUT [RJ45, 8-pin female] Control: 1 x FW [Micro USB, Update port]
Receiver	Input: 1x CAT IN [RJ45, 8-pin female] Output: 1x HDMI OUT [Type A, 19-pin female] Controls: 1x IR IN [3.5mm Stereo Mini-jack] 1x SERVICE [Micro USB, Update port]


Mechanical	
Housing	Metal Enclosure
Color	White / Black
Dimensions	Wall plate: 33.3mm [W] x 65.7mm [D] x 68.7mm [H] Faceplate: 69.9mm [W] x 3mm [D] x 114.3mm [H] Receiver: 88mm (W) x 61mm (D) x 18mm (H)
Weight	Wall plate: 175g, Receiver: 155g
Power Supply	POC (only from Receiver to Transmitter)
Power Consumption	Wall plate: 2.2W (Max), Receiver: 3.72W (Max)
Operating Temperature	32 - 104°F / 0 - 40°C
Storage Temperature	-4 - 140°F / -20 - 60°C
Relative Humidity	20 - 90% RH (no condensation)

5. Product Dimensions:

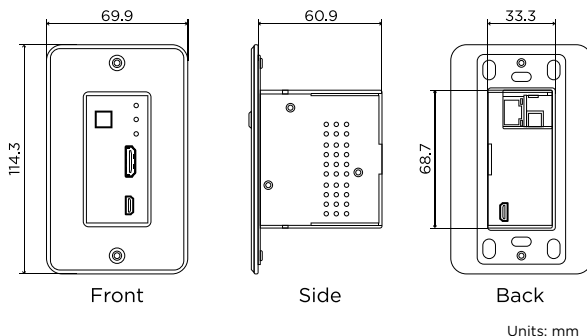


6. Operation Controls and Functions:

6.1 Transmitter Panel

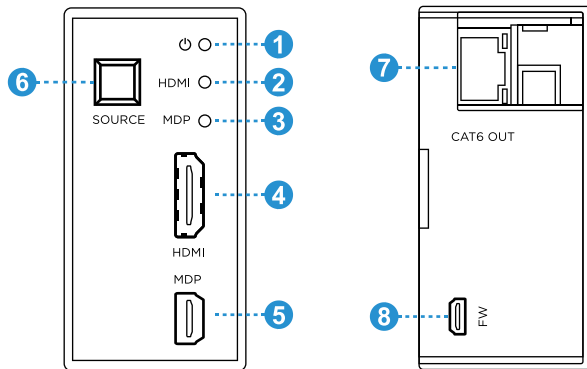

No.	Name	Function Description
1	Power LED	The power LED indicator will illuminate in green when the product is powered on, and red when the product is on standby.
2	HDMI LED	When the HDMI input port is active and the HDMI signal is detected, the green LED will be on.
3	MDP LED	When the MDP input port is active and MDP signal is detected, the green LED will be on.
4	HDMI port	HDMI input port, connect to HDMI source device.
5	MDP port	MDP signal input port.
6	SOURCE button	Used to switch HDMI / MDP input signal.
7	CAT6 OUT	Connect to the CAT IN port of Receiver with a CAT5e/6 cable.
8	FW port	Firmware update port.

6.2 Receiver Panel

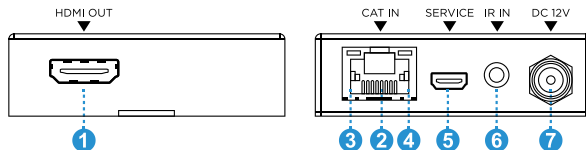


No.	Name	Function Description
1	HDMI OUT	HDMI output port, connect to HDMI display device such as TV or Projector with an HDMI cable.
2	CAT IN	Connect to the CAT6 OUT port on the transmitter with a CAT cable.
3	Power Indicator Lamp (Green)	When the receiver is powered on, the power indicator lamp will be on.
4	Data signal	When there is signal transmission between the transmitter and the receiver, the lamp will be on.
5	SERVICE port	Used for firmware update.
6	IR IN	IR signal input port. Connect to the IR Receiver cable.
7	DC 12V	Plug DC 12V/1A power supply into the unit and connect the adapter to an AC outlet.

Note:

This transmitter supports automatic/manual mode for source signal input. In manual switching mode, press the SOURCE button to select HDMI/DP input source. In automatic switching mode, the last connected or the currently connected source signal will be selected automatically; When both HDMI and MDP ports are connected to active signal, HDMI signal input is preferred.

7. Application Example:

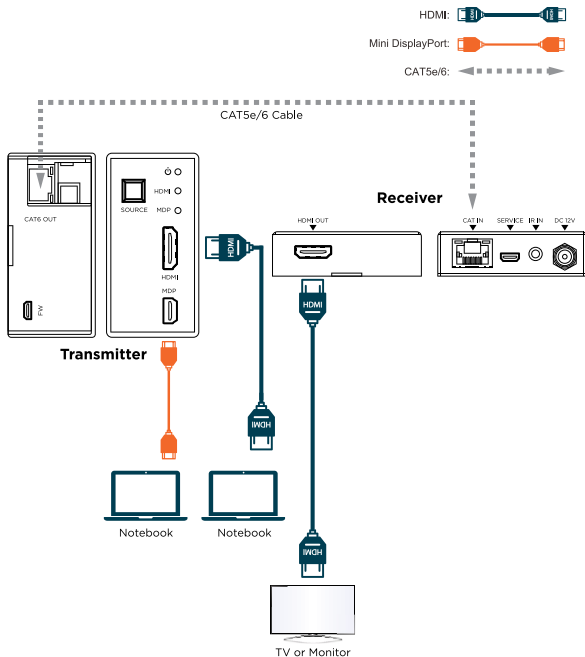

HDMI®
HIGH DEFINITION MULTIMEDIA INTERFACE

The terms HDMI and HDMI High-Definition Multimedia interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.